




# ASHWASHAKTI MB PLOUGH

High-quality,  
cutting-edge,  
robust & economic  
implements

Trusted  
and Durable

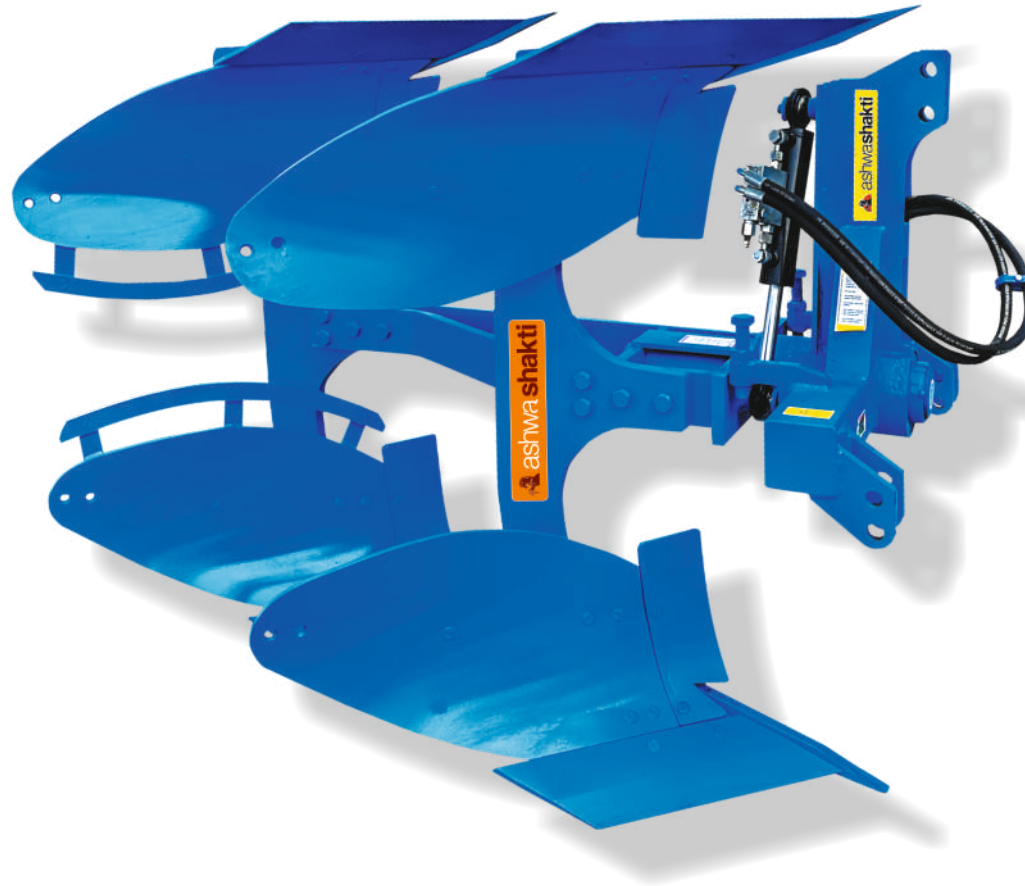

PREMIUM  
QUALITY

BEST  
PRICE

Enables higher depth in stony,  
hard, dry, trashy soil and in soil  
where scouring is a major problem

SAVES TIME, MONEY AND  
GENERATES MORE INCOME



SCAN ME  
WATCH DEMO VIDEOS




## TECHNICAL SPECIFICATIONS

MODEL/FEET	2FHL 340-10	2FHL 360-10	2FHL 380-10	2FHM 420-10	2FHM 440-11	2FHM 460-10	2FHM 480-10
Size	2 Furrow	2 Furrow	2 Furrow	2 Furrow	2 Furrow	2 Furrow	2 Furrow
Frame	100 mm X 25 mm Box	100 mm X 25 mm Box	100 mm X 25 mm Box	100 mm X 25 mm Box	100 mm X 25 mm Box	100 mm X 25 mm Box	100 mm X 25 mm Box
Main Shaft	85 mm round	85 mm round	85 mm round	85 mm Round	95 mm Round	95 mm Round	95 mm Round
Tyne	28 mm(c-type)	30 mm(c-type)	30 mm (c-type)	30 mm (c-type)	28 mm (c-type)	28 mm (c-type)	30mm (c-type)
Working Width	20 inch	20 inch	20 inch	20 inch	22 inch	20 inch	20 inch
Height	45 inch	45 inch	45 inch	45 inch	51 inch	51 inch	51 inch
Blade	10 mm	10 mm	10 mm	10 mm	10 mm	12 mm	12 mm
Mould Board	662-6 mm (13" tyre)	662-8 mm (13" tyre)	731-8 mm (13" tyre)	731-8 mm (13" tyre)	731-8 mm (14" tyre)	731-8 mm (14" tyre)	731-10 mm (14" tyre)
Shovel(point)	32 mm X 25 mm	32 mm X 25mm	32 mm X 25 mm	32 mm X 25 mm	32 mm X 25 mm	38 mm X 25 mm	38 mm X 25 mm
Bearing	32215-33017	32215-33017	32215-33017	32215-33017	33017-33019	33017-33019	33017-33019
Adjustment	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Distance Between Tyne	10 inch	10 inch	10 inch	10 inch	11 inch	10 inch	10 inch
Depth Of Cut	10-12 inch	10-12 inch	10-12 inch	10-12 inch	12-14 inch	12-14 inch	12-14 inch
Weight Approx.	340 kg	360 kg	380 kg	420 kg	440 kg	460 kg	480 kg
Power Required (h.p.)	35 hp	35 hp	35-40 hp	40 hp	40 HP - 45 hp	40 Hp - 45 hp	45 HP - 50 hp
Soil Type	Soft Soil	Soft Soil	Soft Soil	Medium Soil	Medium Soil	Hard Soil	Hard Soil

**NOTE :** \* Accessories shown are not part of standard equipment. \* The company reserves absolute rights to modify the specification of machine components therein without any prior notice.

### SALIENT FEATURES

- Heavy duty mainframe to provide higher life & take higher loads
- Cutting edge design enables to penetrate in field easily
- High tensile fasteners
- Heavy duty 3 point linkage
- Heavy duty tyne
- Reliable to bear the high impacts of load.
- Provides safe and quick turnover action
- Less effort required for operation
- Lesser operator fatigue
- Easy for maintenance & replacement of failed/wear out parts
- Less downtime

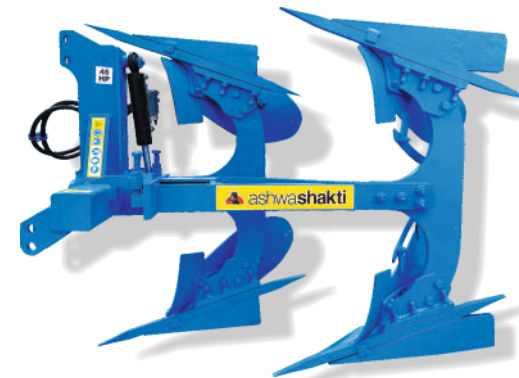

**Ideal for crops like sugarcane, grains, oilseeds, pulses and cotton**



Auth. Dealer



#### AC AGRO TECHNOLOGY

Servey No. 288, Ranjitgadh, Nr. Wellsun Polymers,  
Maliya Highway, Halvad, Dist: Morbi, Gujarat - 363330.  
Email : [marketing@ashwashaktiagro.com](mailto:marketing@ashwashaktiagro.com)  
Web : [www.ashwashaktirotavator.com](http://www.ashwashaktirotavator.com)  
Contact : +91 98794 20340

*Leader in performance*

**Emerging Brand of Agricultural Implements**