



# REVERSE FORWARD ROTAVATOR

High-quality,  
cutting-edge,  
robust & Economic  
Implements

Trusted  
and Durable

PREMIUM  
QUALITY

BEST  
PRICE

A twin way operating compact machine,  
Deep tillage along with  
fine pulverization in the first pass itself,  
Suitable for row to row plantation

All type of Rotavator available




Size Available / Tractor Power (HP)

CM	60	80
HP	15-22	18-25

SCAN ME  
WATCH DEMO VIDEOS



## SAVES TIME, MONEY AND GENERATES MORE INCOME

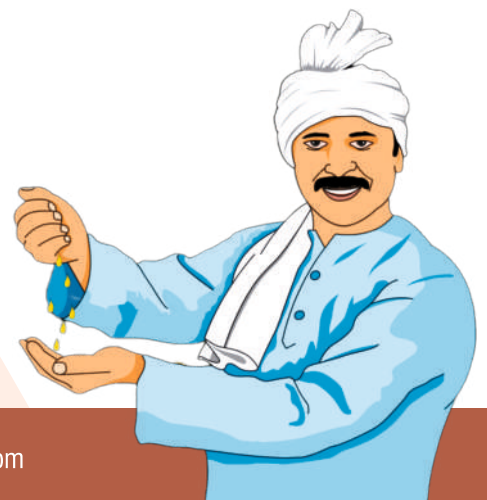

## REVERSE FORWARD : TECHNICAL SPECIFICATIONS

MODEL/CM	RF-60	RF-80
Overall length (mm)	798	958
overall width (mm)		992
Overall Height (mm)		980
Tilling Width (mm)	633	790
Tractor power (HP)	15-22	18-25
Tractor power(KW)	13-19	15-21
3-Point Hitch type		Cat-I
No. of Blade (L-70*7)	18	22
Standard Tyne Construction		Square/Curve
Transmission Type		Chain
Max. Working Depth(mm/inch)		150/6
Rotor Tube Diameter(mm/inch)		73
Rotor Swing Diameter(mm/inch)		484/19.8
Driveline Safety Device		Shear Bolt
Weight (KG)	145	154

## ROTOR RPM CHART

SERIES	INPUT RPM	GEAR BOX	DRIVE	ROTOR RPM
REVERSE FORWARD	540	S.S.	CHAIN	258

## SALIENT FEATURES



Heavy Duty Gearbox



Powder Coated Paint



Boron Steel Blades



Mechanical (Duo cone)  
Oil Seal



Strong Body Frame



Flexible Spring Assembly



High Quality Spare Parts



High Tensile Fasteners

### NOTE :

\* Weight is excluding PTO. Accessories shown are not part of standard equipment.

\* The company reserves absolute rights to modify the specification of machine components therein without any prior notice.



**SUITABLE FOR  
ALL KIND OF CROPS**



### AC AGRO TECHNOLOGY

Servey No. 288, Ranjitgadh, Nr. Wellsun Polymers,  
Maliya Highway, Halvad, Dist: Morbi, Gujarat - 363330.  
Email : [marketing@ashwashaktiagro.com](mailto:marketing@ashwashaktiagro.com)  
Web : [www.ashwashaktiagro.com](http://www.ashwashaktiagro.com)  
Contact : +91 98794 20340

Auth. Dealer



*Leader in performance*

**Emerging Brand of Agricultural Implements**